


A0 DKL

Universal-Dichtkopf, leichte Reihe,
Anschluss passend für Stutzen 24°
DIN EN ISO 8434-1 leichte Reihe und
Stutzen 60° DIN 7631 und DIN 7647.

Universal metric female, light series,
mating with flare 24°
DIN EN ISO 8434-1 light series and
flare 60° DIN 7631 and DIN 7647.




DN	Inch	d ₇	SW ₁	X	l ₄	A.-Art	Bestell-Nr. Order No.
			mm	mm	mm		
5	3/16"	M 12 x 1,5	14	19,8	45,2	A0	71 00 00
6	1/4"	M 14 x 1,5	17	19,8	47,3	A0	71 00 01
6	1/4"	M 16 x 1,5	19	20,8	48,3	A01	71 00 02
8	5/16"	M 16 x 1,5	19	21,3	49,3	A0	71 00 03
8	5/16"	M 18 x 1,5	22	20,8	48,8	A01	71 00 04
10	3/8"	M 18 x 1,5	22	20,8	50,8	A0	71 00 05
10	3/8"	M 22 x 1,5	27	22,8	52,8	A01	71 00 06
12	1/2"	M 22 x 1,5	27	23,5	55,0	A0	71 00 07
16	5/8"	M 26 x 1,5	32	24,5	58,8	A0	71 00 08

A2 DKL 45°

Universal-Dichtkopf, leichte Reihe,
Anschluss passend für Stutzen 24°
DIN EN ISO 8434-1 leichte Reihe und
Stutzen 60° DIN 7631 und DIN 7647.

Universal metric female, light series,
mating with flare 24°
DIN EN ISO 8434-1 light series and
flare 60° DIN 7631 and DIN 7647.

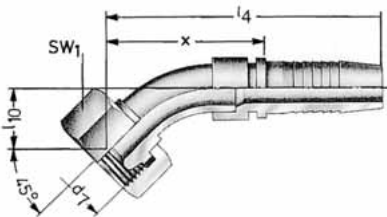


DN	Inch	d ₇	SW ₁	X	L ₁₀	l ₄	A.-Art	Bestell-Nr. Order No.
			mm	mm	mm	mm		
5	3/16"	M 12 x 1,5	14	39,0	16,0	65,5	A2	71 02 11
6	1/4"	M 12 x 1,5	14	39,0	16,0	66,5	A29	71 02 42
6	1/4"	M 14 x 1,5	17	42,0	17,0	69,5	A2	71 02 12
6	1/4"	M 16 x 1,5	19	42,0	16,5	69,5	A21	71 02 13
8	5/16"	M 16 x 1,5	19	45,0	17,0	65,0	A2	71 02 14
10	3/8"	M 18 x 1,5	22	52,0	23,0	82,0	A2	71 02 15
12	1/2"	M 22 x 1,5	27	60,5	25,0	92,0	A2	71 02 17
16	5/8"	M 26 x 1,5	32	53,0	20,0	87,5	A2	71 02 18

Druckbegrenzung nach DIN 20078
beachten.
 Fassungen siehe Seite 52, 53.
 Armaturenwerkstoff: Stahl galvanisch
 verzinkt und passiviert. Sonderwerkstoffe
 und Anschlüsse auf Anfrage.
 Änderungen vorbehalten.

Observe pressure limiting as defined by
DIN 20078.
Sockets see page 52, 53.
Fittings made from steel, zinc-plated
and passivated. For special materials and
fittings please enquire.
Subject to modifications.

A3 DKL 90°

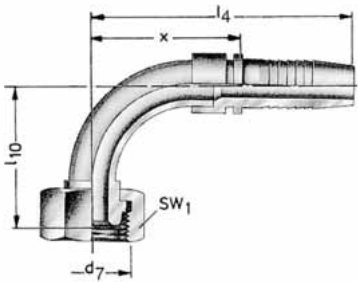

Universal-Dichtkopf, leichte Reihe,
Anschluss passend für Stutzen 24°
DIN EN ISO 8434-1 leichte Reihe und
Stutzen 60° DIN 7631 und DIN 7647.

Universal metric female, light series,
mating with flare 24°
DIN EN ISO 8434-1 light series and
flare 60° DIN 7631 and DIN 7647.

DN	Inch	d ₇	SW ₁	X	L ₁₀	L ₄	A.-Art	Bestell-Nr. Order No.
			mm	mm	mm	mm		
5	3/16"	M 12 x 1,5	14	30,6	29,0	56,0	A3	71 03 11
6	1/4"	M 12 x 1,5	14	31,5	28,5	58,0	A39	71 03 47
6	1/4"	M 14 x 1,5	17	28,5	30,0	56,0	A3	71 03 12
6	1/4"	M 16 x 1,5	19	35,0	31,0	62,0	A31	71 03 13
8	5/16"	M 16 x 1,5	19	30,0	30,0	58,0	A3	71 03 14
10	3/8"	M 18 x 1,5	22	32,0	38,0	61,5	A3	71 03 15
10	3/8"	M 22 x 1,5	27	37,0	41,0	68,0	A31	71 03 16
12	1/2"	M 22 x 1,5	27	42,0	41,0	73,0	A3	71 03 17
16	5/8"	M 26 x 1,5	32	46,0	49,0	80,0	A3	71 03 18