


E1 - CES


metrisches Außengewinde 24° - schwere Reihe DIN 3853

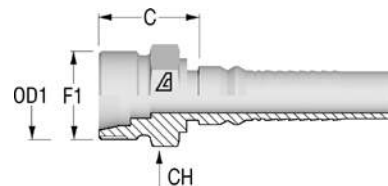

Art. Nr.	Fuss-/ Kopfteil	Überwurfmutter	ID			F1	OD1	C	CH
	Dash/mm		Dash	mm	in				
E1IL-0824	-0824	NA	08	13,0	1/2"	M24X1.5	16	27,0	24,0
E1IL-1030	-1030	NA	10	16,0	5/8"	M30X2	20	31,0	32,0
770420	-1236	NA	12	19,0	3/4"	M36X2	25	35,0	36,0
770425	-1642	NA	16	25,0	1"	M42X2	30	40,0	46,0
770432	-2052	NA	20	32,0	1 1/4"	M52X2	38	45,2	55,0

B5 - DKOS


metrische Dichtkopfarmatur 24° Konus mit O-Ring -
schwere Reihe DIN 3865

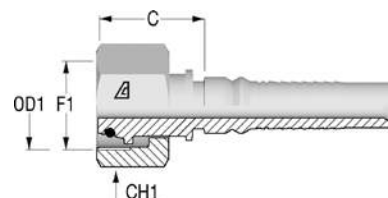

Art. Nr.	Fuss-/ Kopfteil	Überwurfmutter	ID			F1	OD1	C	CH1
	Dash/mm		Dash	mm	in				
B5IL-0824	0824	SN	08	13,0	1/2"	M24X1.5	16	29,6	30,0
B5IL-1030	1030	SN	10	16,0	5/8"	M30X2	20	34,4	36,0
B5IL-1230	1230	TN	12	19,0	3/4"	M30X2	20	37,5	36,0
770120	1236	SN	12	19,0	3/4"	M36X2	25	37,6	46,0
B5IL-1636	1636	TN	16	25,0	1"	M36X2	25	38,8	46,0
770125	1642	SN	16	25,0	1"	M42X2	30	40,7	50,0
B5IL-2042	2042	TN	20	32,0	1 1/4"	M42X2	30	43,6	50,0
770132	2052	SN	20	32,0	1 1/4"	M52X2	38	45,3	60,0
B5IL-2452	2452	TN	24	38,0	1 1/2"	M52X2	38	50,8	60,0

B7 - DKOS 45


45° metrische Dichtkopfarmatur 24° Konus mit O-Ring
schwere Reihe DIN 3865

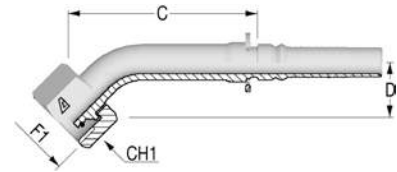

Art. Nr.	Fuss-/ Kopfteil	Überwurfmutter	ID			F1	OD1	C	D-Maß	CH1
	Dash/mm		Dash	mm	in					
B7IL-0824	-0824	SN	08	13,0	1/2"	M24X1.5	16	83,0	29,0	30,0
B7IL-1030	-1030	SN	10	16,0	5/8"	M30X2	20	59,0	31,5	36,0
B7IL-1230	-1230	TN	12	19,0	3/4"	M30X2	20	74,0	33,0	36,0
770220	-1236	SN	12	19,0	3/4"	M36X2	25	78,1	36,0	46,0
B7IL-1636	-1636	TN	16	25,0	1"	M36X2	25	86,5	37,5	46,0
770225	-1642	SN	16	25,0	1"	M42X2	30	96,8	38,0	50,0
770232	-2052	SN	20	32,0	1 1/4"	M52X2	38	112,7	48,0	60,0
B7IL-2452	-2452	TN	24	38,0	1 1/2"	M52X2	38	111,0	44,0	60,0

B8 - DKOS 90

90° metrische Dichtkopfarmatur 24° Konus mit O-Ring -
schwere Reihe DIN 3865

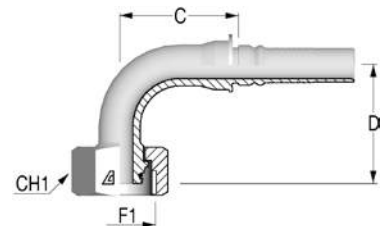

Art. Nr.	Fuss-/ Kopfteil	Überwurfmutter	ID			F1	OD1	C	D-Maß	CH1
	Dash/mm		Dash	mm	in					
B8IL-0824	-0824	SN	08	13,0	1/2"	M24X1.5	16	52,0	50,0	30,0
B8IL-1030	-1030	SN	10	16,0	5/8"	M30X2	20	48,0	55,0	36,0
B8IL-1230	-1230	TN	12	19,0	3/4"	M30X2	20	61,0	67,5	36,0
770320	-1236	SN	12	19,0	3/4"	M36X2	25	61,7	65,0	46,0
B8IL-1636	-1636	TN	16	25,0	1"	M36X2	25	76,5	76,5	46,0
770325	-1642	SN	16	25,0	1"	M42X2	30	86,4	79,0	50,0
770332	-2052	SN	20	32,0	1 1/4"	M52X2	38	90,9	101,0	60,0
770339	-2452	TN	24	38,0	1 1/2"	M52X2	38	100,5	102,0	60,0